



SPECIFICATIONS

MODEL NUMBER	POWER	BORE	STROKE	ROD	RAM : PRESS	SPEED RETURN	CAPACITY (TONS)			G DIMEI W X	
HFP-30 MWH	5 HP 230 1 PH	5"	16"	2.5"	29 IPM	38 IPM	30	1,600	48"	62"	88"

Standard voltages available - please specify when ordering.


H FRAME PRESS 30 Ton Powered Movable Workhead

STANDARD FEATURES

- √ Electric / Hydraulic operation provides smooth, consistent pressing action.
- $\sqrt{\text{Open sides}}$ to facilitate work on long pieces.
- √ Flat ram nose can be easily changed to allow the user to adapt the press to a specific job.
- √ Quality Baldor motor, low speed.
- $\sqrt{\text{Low speed pump quiet, dependable operation.}}$
- √ Self-locking table design eliminates lateral movement.
- √ Powered movable workhead for off-center work allows operator to position the cylinder from left to right with the touch of a lever.
- √ Hydraulic power-lift for vertical displacement of table.
- √ Cylinder activation is fingertip controlled, the more the hand lever is engaged the more the ram movement is accelerated. This allows the operator to control the proper speed for the task.
- √ **High capacity** 10 GAL. hydraulic oil reservoir.
- √ Low pressure hydraulic system maintains lower oil temperatures, resulting in higher efficiency and safer operation.
- √ All hydraulic and mechanical parts are standard in the industry, and available throughout North America.

MODEL	Α	В	C	D	E	F
HFP-30 MWH	75	42	54	34	9	30

DIMENSIONS (INCHES)

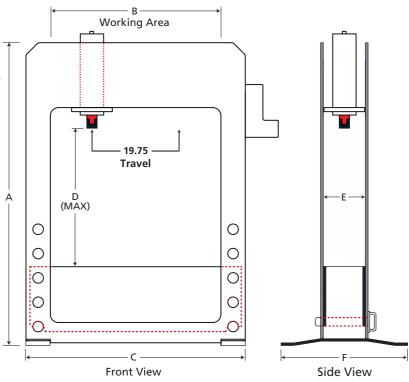

AVAILABLE OPTIONS

- **PR-30** Pressure regulator to limit the ram pressure.
- VB-30 V BLOCKS matched pair.
- **FSG-30** Front safety guard for operator protection.
- **FPS-30 Foot pedal-**electric solenoid valve for hands-free operation, c/w electric control panel.
- **5-24 24 Inch** stroke cylinder.
- **SSE-30** Stop / Start c/w emergency stop button, wired direct to motor.

Custom designs available We Build Them your Way!